

Practical Calibration Procedures for Augmented Reality

Anton Fuhrmann, Dieter Schmalstieg, Werner Purgathofer

Vienna University of Technology,
Karlsplatz 13/186, A-1040 Vienna, Austria
{fuhrmann, schmalstieg, purgathofer}@cg.tuwien.ac.at

Abstract. Augmented Reality overlays computer generated images over the real world. This requires precise knowledge of the viewing projection of the head-mounted display (HMD) and its position. Most of the previously published methods are complicated or use special equipment for the calibration process. We present a collection of calibration methods usable for fast and easy calibration of camera parameters, object/camera to tracker transformations, and image rectification, which do not need additional instrumentation or complicated procedures. They are applicable for both see-through and video-based HMDs and have already been successfully implemented in the *Studierstube* collaborative augmented environment.

1 INTRODUCTION

Virtual Environments (VEs) present to the user computer generated images in the same way a real environment would be perceived: each eye perceives an image depending on its position and the direction of view. These images are generated according to the users heads position in space. The position is tracked by special sensors and used to move the virtual cameras inside the VE accordingly. Slight errors in this process result in a wrong perspective or parallax, giving a false apparent position of the virtual objects.

In an immersive setup these effects can in many cases be overcome, but in *Augmented Reality* [6], where computer generated images overlay the users view of the real surroundings, such distortions cannot be tolerated. When a user perceives two different loci of interaction, one given by the real image of his hand and one by the virtual image on a different position, the perceived clues conflict and hand-to-eye coordination is severely impaired.

Several approaches have been proposed in the past to attack the problems of calibration and registration. However, they are generally not designed to be operated by untrained users. This is a fundamental problem as every user is different, and consequently some per-user setup is inevitable for high-resolution AR. However, a complex or cumbersome process will lack user acceptance and will mostly be ignored. When augmented reality is used outside of research labs, procedures must be simple and may not require trained operator intervention. In this paper, we present a simple, stable and interactive method to implement camera calibration. The method requires little effort on the side of the user and should thus be more appealing to novice users

and experts in lab practice alike. It is usable for see-through HMDs, does not require additional hardware, and is numerically stable. Furthermore a fast solution for the correct alignment of real and virtual objects is presented.

2 Registration in Augmented Reality

The alignment of virtual objects and their associated real counterparts is called registration. The desired result is correct registration of the images of the real and virtual objects. To achieve this alignment, different criteria have to be fulfilled:

- **Correct Sensor Data:** Time lag, nonlinear distortions and noise have to be compensated, otherwise no registration is possible. This lies beyond the scope of this paper; relevant publications are [4][1].
- **Registration of Real and Virtual Objects:** Augmented stationary and moving real objects in the working volume, have to be registered to their virtual counterparts. A simple interactive method is discussed in section 8.
- **Camera Calibration:** To achieve image registration we also need a precise description of the projection from the real world onto the retina. This step, called camera calibration for the remainder of this paper, has to determine the intrinsic and extrinsic parameters of the virtual camera.

The method we use for camera calibration (already partially described in [7]) is simple, stable and interactively applicable. While specifically developed for our shared augmented environment *Studierstube* [13], the calibration procedure is generally applicable wherever quick adaptation of camera parameters to a specific user needed.

3 Previous Work

In photogrammetric camera calibrations [5][8][14][15], as used in data extraction from aerial photos and computer vision, data points in 3D and their 2D projection are measured and an optimization algorithm yields camera parameters. The main disadvantage of these methods when applied to our scenario lies in the relatively large sample of data points they need to converge (50-100) and tendency to behave unstable when presented with erroneous data.

Other camera calibration schemes use additional hardware for calibration: Oishi et.al. [10] use a "shooting gallery", which presents calibration patterns at varying distances to the user, whose head has to be fixed in a previously defined position. The user has to tag all these points to achieve calibration.

Azuma et.al. [1] use orientation markers on a calibrated box, which requires the user to align at the same time two pairs of these markers to each other and a virtual to a real crosshair to define the eye position and orientation. Additional markers allow the measurement of FOV and aspect ratio.

Stationary objects in the real environment can be registered offline by measuring their position and dimensions in the tracker coordinate system. By using image processing techniques [9][16] this can also be done for moving (rigid) objects during the simulation, but the necessary processing power and the low precision [16] and the lack of the necessary depth information [3] preclude us from following this approach.

Furthermore they are only easily applicable for video-based augmented environments and suffer from line-of-sight problems. Best results have been achieved when using pointer-based object registration [16], where users have to touch predefined landmarks on a real object with a tracked pointing device. Like [16] we are using magnetic trackers on our movable augmented objects. Methods of registering these movable tracked objects in the Augmented Environment are discussed in section 8.

4 Requirements

In the following, we discuss the requirements for a calibration method that can be used for augmented reality setups in everyday situations. More concretely, this section analyses requirements for a method that allows untrained users to calibrate the HMD to their personal parameters, resulting in improved registration.

- **Reduced User Effort:** As stated before [1][2] calibration requires in most cases direct interaction of the user. In the stated cases this interaction required a principal understanding of what different calibration steps were supposed to achieve and complex interactions with the system. Our method allows untrained users to calibrate HMDs via a simple, guided approach.
- **Usable for See-Through HMDs:** When using see-through HMDs, which optically overlay the computer images over reality, the users eyes - specifically their position relative to the display surface of the HMD - are an integral part of the registration problem and have to be taken into account when calibrating the virtual cameras. To achieve correct registration for a specific user we have to calibrate the HMD while this specific user is wearing it.
- **No Additional Hardware:** Previous approaches [1][10] make use of additional hardware for calibration. They deliver high-quality calibration results at the expense of a complicated setup and considerable user effort. We avoid the use of additional hardware as far as possible, since it raises additional calibration problems (Mobility, How to register the calibration hardware itself?).
- **Numerically Stable:** Since the precision of the calibration depends on the users' interaction, we have to find a method which presents us with a stable solution. This means that errors in some of the input data points should still produce a viable solution and not render the resulting calibration completely unusable.

5 Calibration Procedure

We use a simple pinhole camera model for calibration, since non-linear lens distortions are to be rectified independently (section 7). Our camera model takes into account the physically decoupled nature of eyepoint and image plane (Figure 3) in a see-through HMD. Since the users eye generally does not lie centered over the projection plane not only the determination of the viewing direction but also of the orientation of the image plane is necessary.

We have implemented a two-step optimization procedure, which optimizes eye position, image plane position and orientation, aspect ratio, and field of view for a given set of data quintuple. Each quintuple contains the 3D coordinates of one sample point and its 2D projection.

The full calibration procedure consists of the following steps:

1. **Acquisition of Calibration Data** The user samples the positions of virtual markers with a 6DOF input device in an interactive process.
2. **Geometric determination of camera parameters** Using inherent geometric properties of the acquired data, a viable solution is determined geometrically.
3. **Numerical Optimization** A further optimization step calculates a solution for off-axis projection.

5.1 Acquisition of Calibration Data

The properties of see-through HMDs make their calibration significantly different from the calibration of video-based HMDs.

Calibration of video-based augmentation [2] only determines the parameters of the video camera. Differences between the cameras parameters (FOV, interpupillary distance, etc.) and the users eyes are not taken into account, since the alignment of real and virtual images can be guaranteed in the first step. One advantage of this setup is that the video images of the real environment can be used to extract the coordinates of the projected data points using image-processing techniques.

The only place where the complete augmented image is visible when using a see-through HMD is at the retina of the user. While one may use a video camera in the position of the users eye, the resulting calibration will only be valid for the position of this camera. The data gathering stage of our calibration scheme therefore has to rely on the user to identify whether a real point in space and its virtual image match.

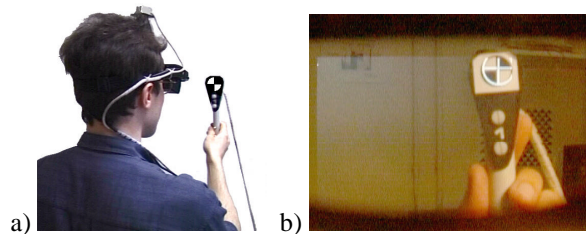


Fig. 1. a) physical setup for calibration;
b) View through the HMD - virtual marker overlays real marker

We present the user with a virtual calibration pattern, on which real points have to be aligned. The user sees the real marker on a tracked pen (Figure 1a), aligns it with a virtual marker (Figure 1b), then presses a button and the next virtual marker is displayed. At the press of the button, tracking data of the pen *and* the HMD is sampled. The position of the pen is transformed in the coordinate system of the HMD tracker sensor, which gives us - together with the 2D location of the virtual marker - one quintuple of calibration data.

5.2 Geometric Determination of Camera Parameters

Since we want to keep the number of sampled data points low (section 4), we need to maximize their information content with respect to our problem. We do this by imposing geometric constraints on the sampled points to allow direct determination of a viable start solution for our numerical optimization step.

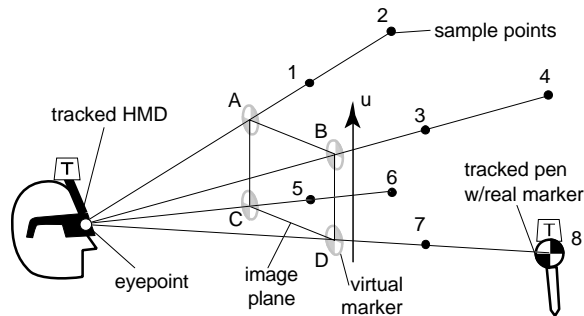


Fig. 2. geometric determination of HMD parameters

In Figure 2 the distribution of sample points for correct calibration is depicted as black circles (1-8). Every pair of samples lies on a line connecting one corner of the image plane with the eye point, essentially defining in this way the viewing pyramid.

In a first optimization step this gives us the location of the eyepoint as a least-squares solution for the point lying nearest to all of these lines. Averaging their direction gives us a good approximation of the viewing direction. As a first approximation at this stage we assume that the viewing direction is normal to the image plane. Intersecting this approximated image plane with the planes defined by the lines (1/2), (3/4), (5/6) and (7/8) gives us approximations for the horizontal, respective vertical directions in image space. Averaging the verticals (A/C, B/D) and the normals of the horizontals (A/B, C/D) gives us an approximation of the up-vector (u) for our camera model.

The aspect ratio of the display area may be approximated in a similar manner from the intersection points of the lines through the sample pairs with the image plane (A, B, C, D), but in most cases this parameter is known for a given HMD.

This intermediate solution already gives a good approximation of the calibration problem. Differences between calculated and measured projections of the data point are in the range of 1-2%. Since this solution only holds for eye positions on the axis of the optical system, we have to append an optimization procedure to account for off-axis positions of the eye.

5.3 Numerical Optimization of Parameters

The parameters optimized in this step are the normal vector of the image plane, field of view (FOV) and - if needed - aspect ratio. Since the solution at this stage is already very good, we do not have to apply sophisticated optimization techniques to it. Like in

section 5.2, a multi-dimensional least-squares optimization [11] is being applied to the geometric solution reached in the previous step. The optimization reaches a stable solution after 20-100 iterations and leads to errors in the range of 0.5-1%.

6 Fast Calibration Procedure

The procedures described above implement a full user-specific calibration of an unknown HMD with attached tracker sensor. It needs user input of 8 sample points per eye (a total of 16 samples per HMD) and yields a virtual camera pair, which is optimized for a specific user, but may be used satisfactorily by others, if they are not willing to repeat the full procedure. Ideally we want a calibration which separates the user-specific parameters (eye position) from parameters fixed for a given HMD/tracker sensor setup similar to [1].

Given a sufficiently linear behavior of the optical system of the HMD which projects the display onto a virtual image somewhere in front of the user, we can assume that each point on the display surface corresponds to a point fixed in space relative to the HMD (Figure 2). It is then possible to determine this projection of points in image space (pixels) on a plane in the HMD coordinate system. This reduces the calibration problem to the determination of the eye position. It eliminates the need for more than one sample point along an edge of the sample frustum, since the 3D location of the virtual marker in real space in combination with the position of the real marker gives us a line in space through the eyepoint.

We are using the full calibration data gathered from a sufficiently large user population to determine the orientation and position of the image plane in real space in a least-squares optimization step similar to section 3. When the eye distances of the users vary sufficiently this optimization terminates with a solution applicable for a wide range of users. While theoretically applicable with only 2 sample points per eye we normally use all 4 corner locations to optimize user effort versus error margin. The resulting errors (0.7-1.5%) are slightly higher than when full calibration is applied but the solution is still better than an "averaged" camera without user-specific calibration.

7 Distortion Compensation

A further problem for correctly registering an Augmented Environment are non-linear distortions introduced by the optical system of the HMD or video camera, as depicted in Figure 3a. These distortions result from different focal lengths of the optical system for different points in the image plane. Equivalent distortions are introduced by the optical system inside a see-through HMD.

Photogrammetric calibration schemes like [14] mostly include some parameter(s) for describing radial distortions, which allows a rectification of image data on a point-by-point basis. Since this does not work on a standard OpenGL graphics hardware, where only linear and perspective distortions are directly possible, we use an approach similar to the one used in [2], where video images are non-linearly distorted before being fed into a video-based HMD.

To implement a general image we take advantage of the OpenGL texture mapping mechanism. To rectify an image we use it as a texture and map it onto a screen-aligned

segmented plane - the rectification grid - using the inverse of the distortion to generate the texture coordinates.

Since we are sampling the inverse distortion function at the vertices of the rectification grid we do not need to determine the closed form of the function at all. All we have to do is take a distorted image of the calibration pattern in Figure 3a, measure the positions of the intersections and map these positions as *texture coordinates* onto the undistorted rectification grid. The texture hardware then rectifies the distorted images, using linear interpolations inside the grid squares (Figure 3b).

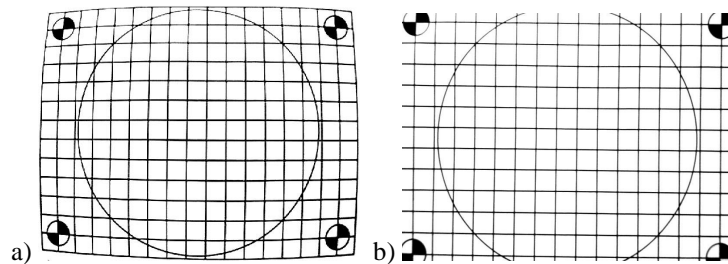


Fig. 3. a) distorted video image of calibration pattern
b) distortion compensated image

To apply this method to see-through HMDs we distort the computer-generated image instead of a video image. This is done by rendering into a separate region of the frame buffer and then using this region as a texture map. In this case of course the distortion has to be the same as the one seen through the HMD. Calibration data for this case can be gathered by letting the user click on markers lined up on the intersections of the rectification grid or - a simpler and faster approach - by capturing an image of the calibration pattern through the HMD.

8 Registration of Virtual to Real Objects

Registration of real objects to virtual counterparts has several uses. In the case of a physically based simulation for examples a virtual ball has to bounce on a real table, or annotations and instructions have to appear aligned to components of a real object [6]. We have used tracked approximations of the users head and limbs to simulate the occlusion of virtual objects by the users body [1].

We have used an approach similar to [16] for registering static objects, but use a simpler method for registration of *tracked objects*. Tracked objects are objects are represented as rigid objects moving like their real counterparts. In our approach, the user is presented with an augmented view of the real object, overlaid with its (non-aligned) virtual representation (Figure 4a). Using keystrokes, the augmented geometry moves and rotates *screen-aligned* to cover the actual object. The user aligns the virtual object with the real from one viewing direction as shown in Figure 4a and Figure 4b, then turns the physical object around to look at it from another direction (Figure 4c). The procedure is repeated until satisfactory registration is achieved (Figure 4d).

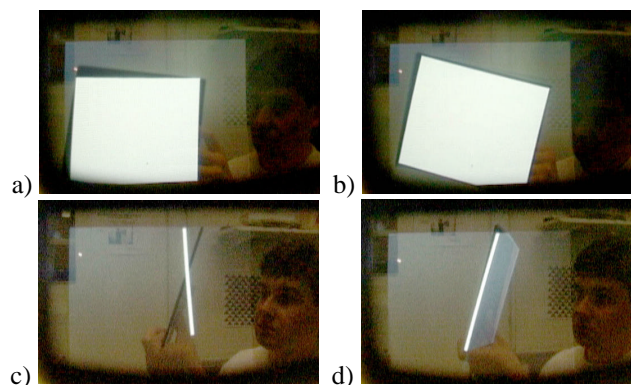


Fig. 4. registration of virtual to real object; a) front view – misaligned; b) front view – aligned; c) side view – misaligned; d) registered

9 Implementation details

The HMD calibration has been implemented as an extension to Open Inventor (OIV)[12], making it possible to save user-specific calibrated cameras in the standard OIV file format (VRML 1.0).

The calibration is an user-guiding step-by-step process: The user sees virtual markers directly corresponding in size and shape to the real marker, prompting for a correct alignment in the image plane *and* the distance. Figure 5a and b show the markers according to the upper right corner at near and far location respective. When the optimization procedure detects one or more measurements beyond the tolerated error margin it prompts the user to repeat the necessary steps. During the calibration process the user may correct measurements by using a "back" button on the pen.

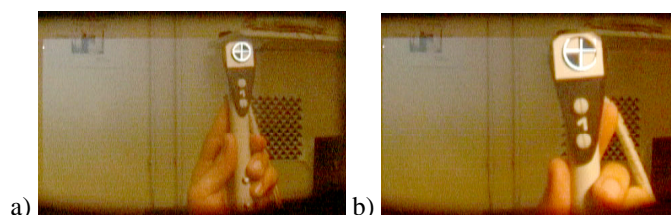


Fig. 5. guiding the user by differently sized markers. a) far sample point, b) near sample point

Since some people have problems closing a single eye, they expected to have difficulties with having to align markers. These problems did not occur, since the virtual marker is only presented to one eye at a time.

The calibration method has been applied to stationary cameras, thereby fixing their position in space without the expense of an additional tracker sensor. We use this setup to generate videos for documentation purposes. The augmented illustrations

have been captured with a digital camera directly through the optical system of our HMD - virtual-io i-glasses. The distortion compensation has been implemented and tested on a SGI O2 R5000 workstation, using the O2 system camera as video source.

10 Results

Figure 6 shows the results of a full registration procedure. The virtual marker is in this case tracked and follows the real marker on the tracked pen over the whole working volume, independent of the users heads position and orientation.

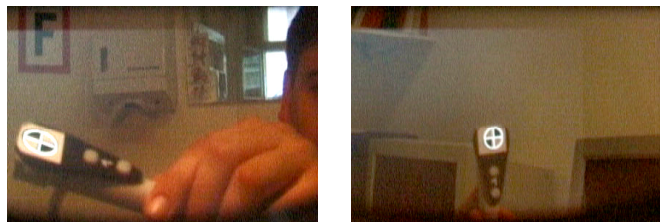


Fig. 7. resulting registration of virtual to real marker

Figure 7 demonstrates the real-time distortion compensation. The method described in section 7 has been applied to a live video stream captured by a Silicon Graphics O2 system camera. The distinct barrel distortion in Figure 7a has been compensated in Figure 7b. Our implementation of this method rectified the video at a rate of 22 frames per second (including video capturing time) on a SGI O2 R5000.



Fig. 8. a) distorted video image, b) distortion compensated image

11 Conclusions and future work

The advantages of the presented calibration methods lie mainly in their simplicity of implementation and ease of application. The task of matching one distinctive image with another – especially when embellished by the user-guiding interface - seems to be more tolerable to the user than others we have tested.

The disadvantages of the method in this context lie mostly in its dependence on precise user input and tracker precision. We are planning to apply Kalman filtering

directly to the measurements already transformed into head-tracker coordinates to improve the precision.

ACKNOWLEDGMENTS: Thanks to Rainer Splechtna for his excellent implementation. This work has been supported by the Austrian Science Funds (FWF) under project no. P-12074-MAT.

REFERENCES

- [1] Azuma, R. and Bishop, G. Improving Static and Dynamic Registration in an Optical See-Through HMD. Proceedings of SIGGRAPH '94, pp. 197-204, ACM Press, July 1994.
- [2] Bajura, M., and Neumann, U. Dynamic Registration Correction in Augmented-Reality Systems. VRAIS'95, IEEE Computer Society Press. Los Alamitos, CA, pp.189-196, 1995.
- [3] Berger, M. Resolving Occlusion In Augmented Reality: A Contour Based Approach Without 3D Reconstruction. Proceedings of Conference on Computer Vision and Pattern Recognition, IEEE, 1997, Poster Session 1.
- [4] Bryson, S. Measurement and calibration of static distortion of position data from 3D trackers. Virtual Reality for Visualisation (IEEE Visualisation), pp. 179-189, 1993.
- [5] Faugeras, O. Three-dimensional computer vision: a geometric viewpoint. ISBN 0-262-06158-9, MIT Press, 1996.
- [6] Feiner, S., MacIntyre, B., and Seligmann, D. Annotating the Real World with Knowledge-Based Graphics on a See-Through Head-Mounted Display. Proceedings of Graphics Interface'92, pp. 78-85, 1992.
- [7] Fuhrmann, A., Schmalstieg, D., and Purgathofer, W.: Simple User-Centered HMD Calibration for Augmented Reality. Proceedings VRST'99, pp. 166-167, Dec.1999.
- [8] Janin, A., Mizell, D. and Caudell, T. Calibration of head-mounted displays for augmented reality applications. In Proceedings of the Virtual Reality Annual International Symposium (VRAIS '93), pp. 246-255, September 1993.
- [9] Kutulakos, K. and Vallino, J. Calibration-Free Augmented Reality. IEEE Transactions on Visualization and Computer Graphics, 4(1), pp. 1-20, January 1998.
- [10] Oishi T. and Tachi, S. Methods to Calibrate Projection Transformation Parameters for See-Through Head-Mounted Displays. Presence, 5(1), pp. 122-135, 1995.
- [11] Press, W., Flannery, B., Teukolsky, S., and Vetterling, W.: Numerical Recipes in C. Cambridge University Press, 1988.
- [12] Strauss, P. and Carey, R.. An Object Oriented 3D Graphics Toolkit. Proceedings of SIGGRAPH'92, pp. 341-347, 1992.
- [13] Szalavari, Zs., Schmalstieg, D., Fuhrmann, A., Gervautz, M. Studierstube - An Environment for Collaboration in Augmented Reality, Virtual Reality: Research, Development & Applications, pp. 37-43, 1998
- [14] Tsai, R.. An efficient and accurate camera calibration technique for 3D machine vision. Proceedings CVPR '86, pp. 364-374, IEEE, June 1986.
- [15] Tuceryan, M., Greer, D., Whitaker, R., Breen, D., Crampton, C., Rose, E., and Ahlers, K., Calibration Requirements and Procedures for Augmented Reality, IEEE Transactions on Visualization and Computer Graphics, Vol. 1, No. 3, September 1995.
- [16] Whitaker, R., Crampton, C., Breen, D., Tuceryan, M., and Rose, E. Object Calibration for Augmented Reality. Proc. EUROGRAPHICS'95, pp. 15-27, 1995.